


Clevis Sling Hook (EGK)

- Clevis design prevents hook to chain size mismatch
- Wide throat opening for easy rigging
- Drilled so that heavy duty latch can be added in the field at a later date
- Full traceability
- Proof tested and certified



MODEL	GHAIN SIZE (INCHES)	GRADE	WORKING LOAD LIMIT * (Lbs) at 90°	DIMENSIONS (INCHES)				WEIGHT lbs
				L	B	G	H	
EGK-7-10	9/32	100	4,300	3.7	1.3	0.67	0.87	1.1
EGK-8-10	5/16	100	5,700	3.7	1.3	0.67	0.87	1.1
EGK-10-10	3/8	100	8,800	4.8	1.6	0.91	1.2	2.2
EGK-13-10	1/2	100	15,000	5.7	1.9	1.1	1.5	4.4
EGK-16-10	5/8	100	22,600	6.7	2.4	1.4	1.8	8.4
EGK-20-10	3/4	100	35,300	8.2	2.8	1.7	2.4	16.1

* Design Factor 4:1 Proof tested and certified

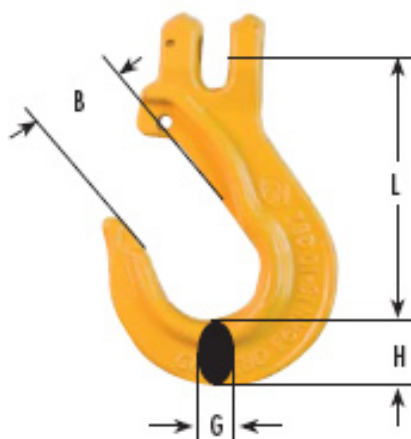


Clevis Type with Latch (EGKN)

- Wide throat opening for easy rigging
- Hood forged in hook protect latch top
- Latch spring is stainless steel
- Heavy duty latch tip interlocks with hook body
- Replacement latch can be installed in the field
- Full traceability
- Proof tested and certified



MODEL	CHAIN SIZE (Inches)	GRADE	WORKING LOAD LIMIT * (Lbs) at 90°	DIMENSIONS (Inches)				WEIGHT EACH lbs
				L	B	G	H	
EGKN-7-10	9/32	100	4,300	3.7	1.1	0.67	0.87	1.1
EGKN-8-10	5/16	100	5,700	3.7	1.1	0.67	0.87	1.1
EGKN-10-10	3/8	100	8,800	4.8	1.4	0.91	1.2	2.2
EGKN-13-10	1/2	100	15,000	5.7	1.7	1.1	1.5	4.4
EGKN-16-10	5/8	100	22,600	6.7	2.0	1.4	1.8	8.4
EGKN-20-10	3/4	100	35,300	8.2	2.4	1.7	2.4	16.8

* Design Factor 4:1 Proof tested and certifie

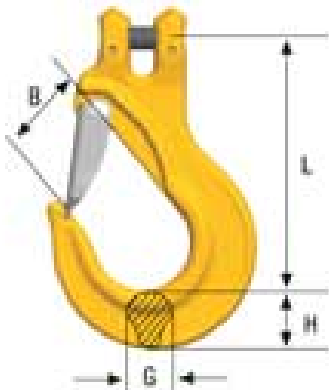

Eye Sling Hook With Latch (EKN)


- Wide throat opening for easy rigging
- Oversized eye allows for use in both chain or wire rope slings
- Hood forged in hook protects latch top reducing damage
- Latch spring is stainless steel
- Heavy duty tip interlocks with hook body
- Replacement latch can be installed in the field
- Full traceability
- Proof tested and certified



MODEL	CHAIN SIZE Inches	GRADE	WORKING LOAD LIMIT * (Lbs) at 90°	DIMENSIONS						WEIGHT EACH lbs
				L	B	G	H	E	F	
EKN-7/8-10	9/32	100	4,300	4.3	1.1	0.67	0.91	1.1	0.51	1.1
EKN-7/8-10	5/16	100	5,700	4.3	1.1	0.67	0.61	1.1	0.51	1.1
EKN-10-10	3/8	100	8,800	5.3	1.5	0.9	1.2	1.3	0.59	2.2
EKN-13-10	1/2	100	15,000	6.5	1.7	1.1	1.5	1.7	0.75	4.4
EKN-16-10	5/8	100	22,600	8.0	2.0	1.4	1.8	2.2	0.94	8.2
EKN-18/20-8	3/4	80	28,300	9.0	2.4	1.6	2.0	2.4	1.0	11.5
EKN-22-8	7/8	80	34,200	10.5	3.0	1.7	2.6	2.5	1.2	20.7
EKN-26-8	1	80	47,700	11.9	3.2	2.0	3.0	2.6	1.3	27.8
EKN-32-8	1-1/4	80	72,300	13.1	3.7	2.4	3.1	3.0	1.5	39.5

* Design factor 4:1 Proof tested and certified.

EKN sling hook replaces OKN

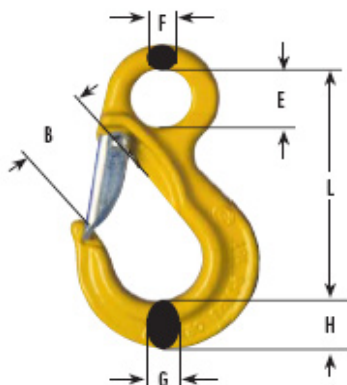

Sling Hook with Latch (SKN / ESKN)

- Can be attached directly to a master link, chain, wire rope, or synthetic slings
- Part of the Gunnebo Lifting SK System
- Wide throat opening for easy rigging
- Latch spring is stainless steel
- Full traceability
- Proof tested and certified
- Heavy duty tip interlocks with hook body
- Replacement latch can be installed in the field



MODEL	CHAIN SIZE (INCHES)	WORKING LOAD LIMIT * (Lbs) at 90°	DIMENSIONS (INCHES)						WEIGHT EACH lbs
			L	L1	B	B1	G	H	
SKN-7/8-8	9/32	3,500	3.5	4.6	1.3	1.1	0.71	0.83	1.1
SKN-7/8-8	5/16	4,500	3.5	4.6	1.3	1.1	0.71	0.83	1.1
SKN-10-8	3/8	7,100	4.5	5.9	1.6	1.3	0.91	1.1	2.4
ESKN-13-8	1/2	12,000	5.7	7.4	2.0	1.7	1.1	1.4	5.1
ESKN-16-8	5/8	18,100	7.1	9.2	2.4	2.1	1.3	1.7	9.0
ESKN-18/20-8	3/4	28,300	7.8	10.2	2.6	2.3	1.6	2.0	13.4

* Design Factor 4:1 Proof tested and certified




Ball Bearing Swivel Sling Hook, Eye Type (LKNK)

- Ball bearing allows hook to swivel under load
- Wide throat opening for easy rigging
- Latch spring is stainless steel
- Full traceability
- Proof tested and certified
- Heavy duty tip interlocks with hook body
- Replacement latch can be installed in the field



MODEL	CHAIN SIZE (INCHES)	GRADE	WORKING LOAD LIMIT * (Lbs) at 90°	DIMENSIONS (INCHES)								WEIGHT EACH lbs
				L	B	G	C	H	E	F		
LKNK-7/8-8	9/32	80	3,500	6.1	1.1	0.71	1.1	0.93	1.4	0.47	2.0	
LKNK-7/8-8	5/16	80	4,500	6.1	1.1	0.71	1.1	0.93	1.4	0.47	2.0	
LKNK-10-8	3/8	80	7,100	7.5	1.4	0.9	1.4	1.2	1.7	0.59	3.3	
LKNK-13-8	1/2	80	12,000	9.4	1.6	1.1	1.9	1.4	1.9	0.75	6.8	
LKNK-16-8	5/8	80	18,100	11.6	2.1	1.3	2.3	1.7	2.4	0.87	11.7	

*Design Factor 4:1 Proof tested and certified

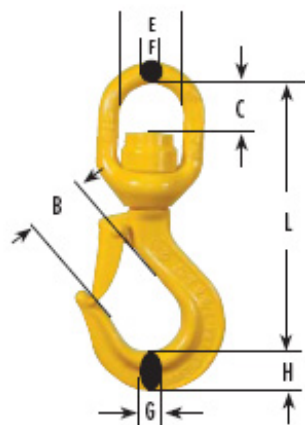


Round Sling Hook (RH)

- Quickly attaches through the latch to synthetic round or web slings
- Can be permanently attached or easily removed when not required
- Rated at a design factor of 5 to match the design factor of most synthetic slings.
- Field replaceable latch interlocks at hook tip and includes a weather resistant stainless steel spring
- Full traceability for each component
- Each of the components has been Proof tested and certified



MODEL	GRADE	WORKING LOAD LIMIT * (Lbs) at 90°	DIMENSIONS (Inches)						WEIGHT EACH (Lbs.)
			L	B	D	G	H	M	
RH-1-10	100	2,200	4.6	0.94	1.4	3.3	2.9	0.31	0.88
RH-2-10	100	4,400	5.4	1.1	1.6	3.8	3.4	0.39	1.5
RH-3-10	100	6,600	6.6	1.3	1.9	4.6	4.3	0.47	3.1
RH-5-10	100	11,000	8.7	1.7	2.9	6.1	5.2	0.65	7.1

* Design Factor 5:1 Proof tested and certified

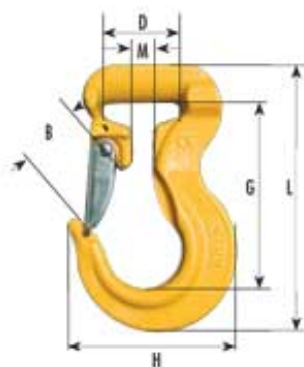


Alloy Foundry Hooks – Eye Type OKE

- I-Beam construction allows thinner hook body to reach more pick-points than most other foundry hooks
- Oversize eye connection permits fabrication into chain or wire rope slings
- Full traceability
- Proof tested to 2 ½ times working load limit



MODEL	CHAIN SIZE (INCHES)	GRADE	WORKING LOAD LIMIT * (Lbs) at 90°	DIMENSIONS (INCHES)						WEIGHT EACH lbs
				L	B	E	F	G	H	
OKE-7/8-10	9/32	100	4,300	4.8	2.5	1.1	0.45	0.79	1.0	1.5
OKE-7/8-10	5/16	100	5,700	4.8	2.5	1.1	0.45	0.79	1.0	1.5
OKE-10-10	3/8	100	8,800	5.9	3.0	1.3	0.59	1.0	1.1	2.9
OKE-13-10	1/2	100	15,000	7.2	3.5	1.7	0.75	1.3	1.5	6.2
OKE-16-10	5/8	100	22,600	8.5	4.0	2.2	0.91	1.6	1.8	10.8
OKE-18/20-8	3/4	80	28,300	9.7	4.5	2.4	1.0	1.8	2.2	13.4
OKE-26-8	1	80	47,700	11.8	4.4	2.8	1.4	2.5	2.9	36.1
OKE-32-8	1-1/4	80	72,300	15.1	5.7	3.5	1.7	3.0	3.7	67.0


*Design Factor 4:1 Proof tested and certified.

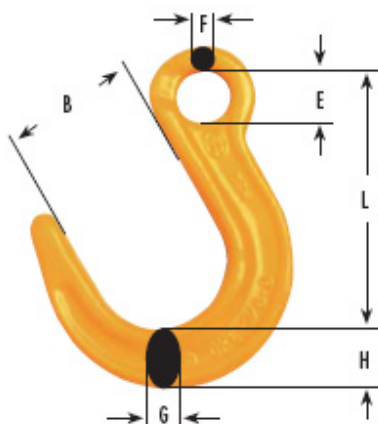

Container Lifting Hook (CH-3)

- Large eye for easy connection to wire rope or chain legs.
- Full traceability
- Proof tested and certified

NOTE: CH-3 Container Lifting Hooks intended for use as part of a spreader beam lifting system.

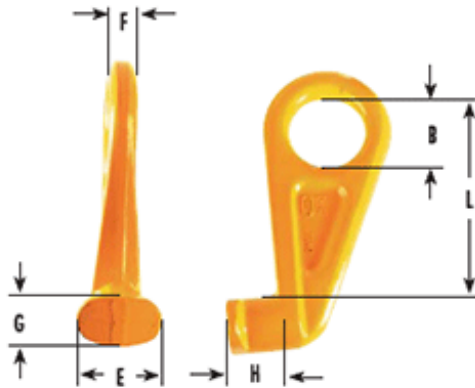

MODEL	GRADE	WORKING LOAD LIMIT * (Lbs) at 90°	DIMENSIONS (INCHES)						WEIGHT (LBS)
			L	B	H	F	E	G	
CH-3-Straight	80	27,500	7.6	2.8	1.8	1.0	3.0	1.9	8.8
CH-3 45° R	80	27,500	7.6	2.8	1.8	1.0	3.0	1.9	8.8
CH-3 45° L	80	27,500	7.6	2.8	1.8	1.0	3.0	1.9	8.8

*Design Factor 4:1 Proof tested and certified

Left hook marked with "V" Right hook marked with "H"

Sling Tags & Spare Parts

