


**Cable Socks A Series**

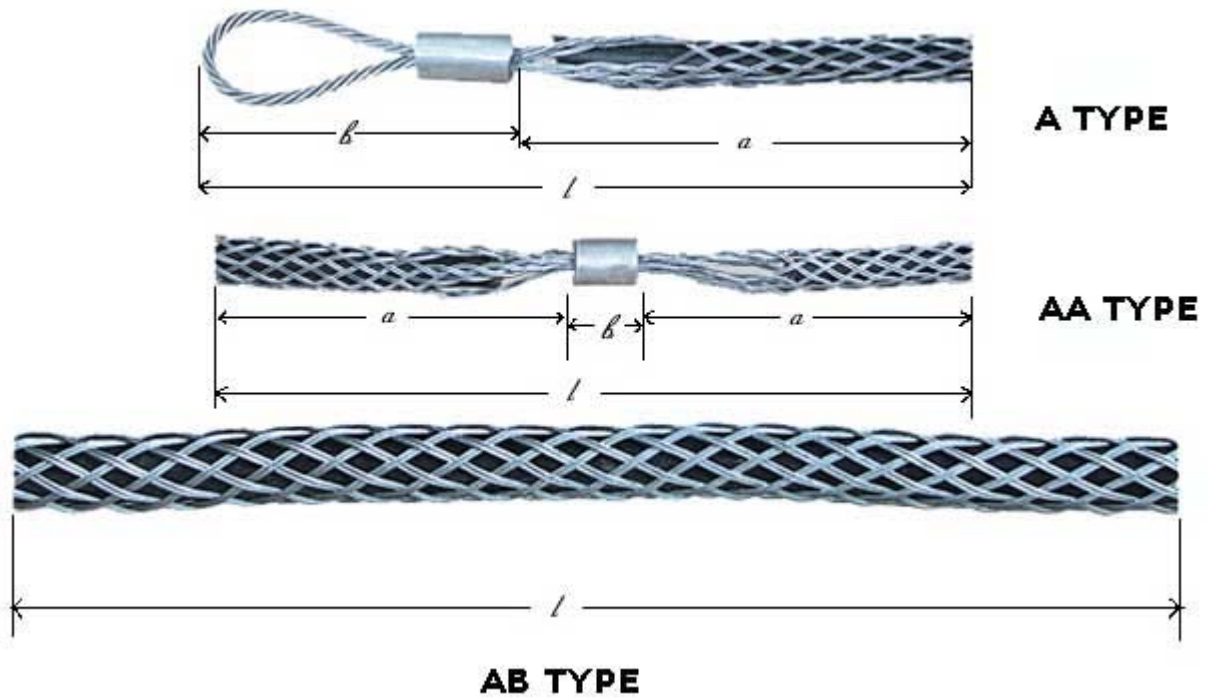

CABLE SOCKS A TYPE					
SIZE / MM	A	B	L	WEIGHT / KG	MAX. WORKING LOAD (KG)
8 - 11	350	140	490	-	600
11 - 13	400	190	590	-	1200
13 - 16	500	190	690	-	1200
16 - 21	550	220	770	0.38	1500
21 - 25	750	220	970	0.49	2000
25 - 30	750	250	1000	0.50	3000
30 - 35	900	300	1210	1.23	3500
35 - 42	1000	360	1360	1.75	4000
42 - 50	1300	360	1660	2.00	4500

CABLE SOCKS AA TYPE					
SIZE / MM	A	B	L	WEIGHT / KG	MAX. WORKING LOAD (KG)
8 - 11	350	140	840	-	600
11 - 13	400	210	1010	-	1200
13 - 16	500	210	1210	-	1200
16 - 21	550	220	1320	-	1500
21 - 25	750	220	1720	0.90	2000

25 - 30	750	220	1720	0.90	3000
30 - 35	900	280	2080	1.10	3500
35 - 42	1000	280	2280	2.07	4000
42 - 50	1300	280	2880	3.05	4500


**CABLE SOCKS AB TYPE**

SIZE / MM	L	WEIGHT / KG	MAX. WORKING LOAD (KG)
8 - 11	750	-	600
11 - 13	900	-	1200
13 - 16	1200	-	1200
16 - 21	1300	0.25	1500
21 - 25	1600	0.50	2000
25 - 30	1700	0.67	3000
30 - 35	2000	0.73	3500
35 - 42	2250	1.65	4000
42 - 50	2700	2.30	4500

**Cable Socks B Type**



Cable Diameter Range (mm)	M (MM)	E (MM)	Approx. Breaking Strength (Kg)
<b>SHORT TYPE</b>			
13 - 16	280	127	2500
16 - 19	280	127	3000
19 - 25	508	152	3000
25 - 32	508	178	5700
32 - 38	533	178	5700
38 - 50	635	178	7400
51 - 63	660	203	12200
63 - 76	711	254	14900
76 - 89	762	254	18500
89 - 102	813	254	21600
102 - 114	838	254	21600

STANDARD TYPE			
13 - 16	406	127	2500
16 - 19	406	127	3000
19 - 25	813	152	3000
25 - 38	838	178	7400
38 - 50	864	178	7400
51 - 63	914	229	12200
63 - 76	965	254	14900
76 - 89	990	254	18500
89 - 102	1041	254	21600
102 - 114	1067	254	21600
114 - 126	1473	254	21600
127 - 152	1524	254	21600
152 - 177	1676	254	21600

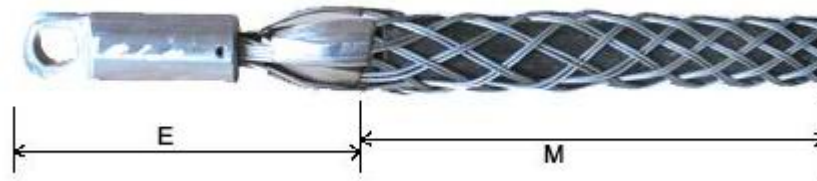**Cable Socks BS Type**


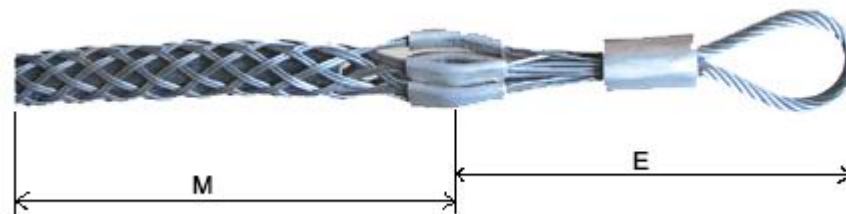
Cable Diameter Range (mm)	M (MM)	E (MM)	Rated Load (Kg)	Weight (Kg)
19 - 35	630	180	1000	0.35
25 - 50	760	200	2000	0.70
38 - 60	950	210	2000	0.80
50 - 75	1020	240	2500	1.03
75 - 100	1120	260	2500	2.50

**Cable Socks C Type**

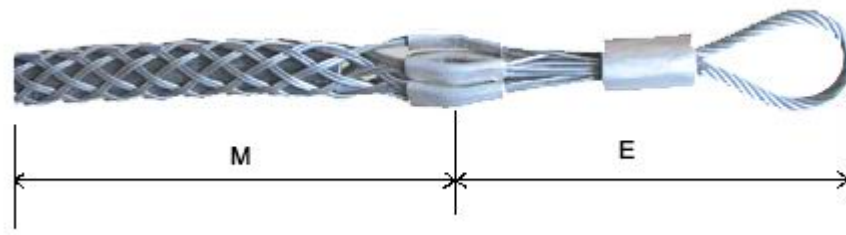


Cable Diameter Range (mm)	M (MM)	E (MM)	Approx. Breaking Strength (Kg)
<b>SHORT TYPE</b>			
13 - 16	533	203	2000
16 - 19	540	150	2500
19 - 25	680	133	3000
25 - 38	870	171	4300
38 - 50	1000	210	7400
51 - 63	610	305	8300
63 - 76	610	305	11000
76 - 89	610	356	11000
89 - 102	660	356	14000
<b>STANDARD TYPE</b>			
19 - 25	914	229	3000
25 - 38	914	229	4300
38 - 50	914	279	7400
51 - 63	914	305	8300
63 - 76	914	305	11000
76 - 89	914	356	11000
89 - 102	1016	356	14000

**Cable Socks CS Type**




Cable Diameter Range (mm)	M (MM)	E (MM)	Rated Load (Kg)	Weight (Kg)
7 - 12	330	85	300	0.05

13 - 18	330	85	400	0.05
18 - 24	400	120	600	0.10
16 - 30	500	150	700	0.13
19 - 35	630	280	1100	0.25
25 - 50	760	305	2000	0.53
38 - 60	950	320	2000	0.65
50 - 75	1020	350	2500	0.85
75 - 100	1120	380	2500	2.20
100 - 125	2770	350	3000	4.50

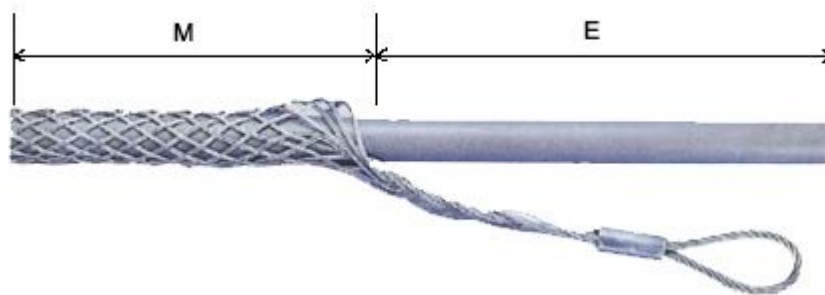**Cable Socks S Type**


Cable Diameter Range (mm)	M (MM)	E (MM)	Approx. Breaking Strength (Kg)
<b>STANDARD TYPE</b>			
19 - 25	280	127	1100
25 - 32	280	127	1600
32 - 38	508	152	1800
38 - 44	432	229	1800
44 - 50	457	254	1800
51 - 63	483	254	1800
63 - 76	508	254	1800
76 - 89	533	305	1800
89 - 102	559	305	1800
<b>LONG TYPE</b>			
19 - 25	508	178	1100
25 - 32	508	203	1600
32 - 38	584	203	1800
38 - 50	635	229	1800
51 - 63	660	254	1800
63 - 76	736	254	1800
76 - 89	813	305	1800
89 - 102	889	305	1800

**Cable Socks SA Type**

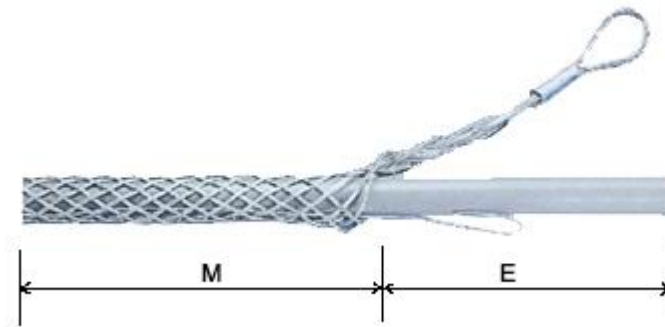

Cable Diameter Range (mm)	M (MM)	E (MM)	Approx. Breaking Strength (Kg)
19 - 25	305	178	1100
25 - 32	381	203	1600
32 - 38	406	203	1800
38 - 44	432	228	1800
51 - 63	483	254	1800
63 - 76	508	254	1800
76 - 89	533	305	1800
89 - 102	559	305	1800
102 - 144	838	254	2200