


Hand Spliced Sling

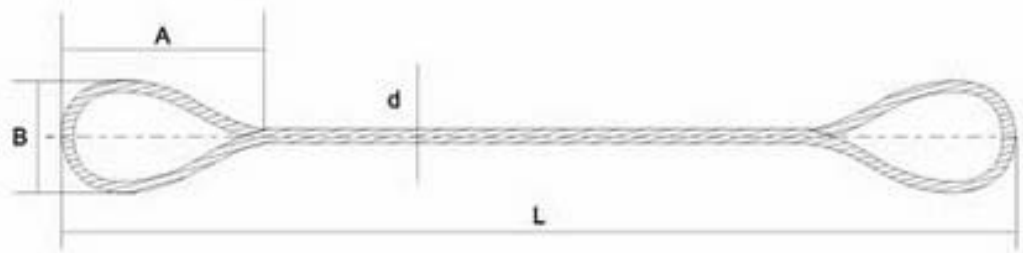

USAGE: Lifting, binding, Hauling and General Industry

NOTE: Hand spliced slings are made by galvanized or bright steel wire rope. The end of the inserting part can be coated with PVC or stressed with aluminum as safeguard. The slings above can be manufactured by 6x19, 6x24, 6 x 37 steel wire rope. We can produce according to customers specifications including the material, dimension and packing.

Item No.	Diameter	Length	Width	1570N/mm ²		1670N/mm ²		1770N/mm ²	
	d	A	B	(160Kgf/mm ²)		(170Kgf/mm ²)		(180Kgf/mm ²)	
	mm	mm	mm	MBL(T)	SWL(T)	MBL(T)	SWL(T)	MBL(T)	SWL(T)
67401	6	160	80	/	/	/	/	2	0.33
67402	9	200	100	3.63	0.61	3.87	0.64	4.1	0.68
67403	10	240	120	4.48	0.75	4.77	0.8	5.06	0.84
67404	12	240	120	6.46	1.08	6.87	1.15	7.28	1.12
67405	14	240	120	8.79	1.47	9.35	1.56	9.91	1.65
67406	16	280	140	11.48	1.91	12.21	2.04	12.95	2.16
67407	18	320	160	14.53	2.42	15.46	2.58	16.39	2.73
67408	20	360	180	17.94	2.99	19.08	3.18	20.22	3.37
67409	22	400	200	21.71	3.62	23.09	3.85	24.48	4.08
67410	24	440	220	25.84	4.31	27.48	4.58	29.13	4.86
67411	26	480	240	30.33	5.05	32.26	5.38	34.18	5.7
67412	28	520	260	35.16	5.86	37.41	6.23	39.65	6.61
67413	30	560	280	40.37	6.73	42.94	7.16	45.51	7.59